


(HS)

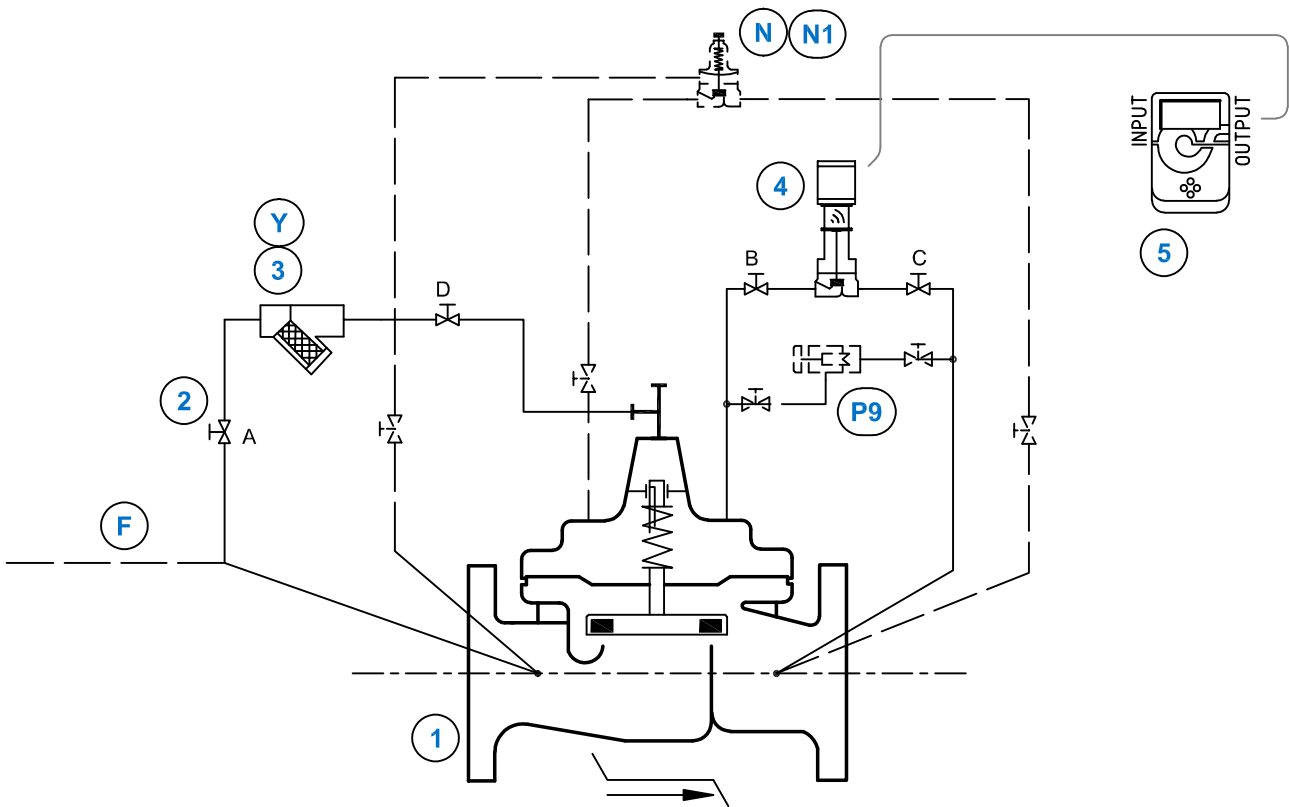

STANDARD EQUIPMENT

No	Description	Qty	Type
1	MAIN VALVE HYTROL/X743 AE/GE/NGE	1	100-01/X743
2	ISOLATION BALL VALVE	4	RB-117
3	STRAINER	1	X43
4	POSITION CONTROL ACTUATED	1	CPC-34 #
5	ELECTRONIC ADVANCED CONTROLLER	1	D22

OPTIONAL FEATURES

No	Description	Qty	Type
F	REMOTE SENSING	1	-
N	UPSTREAM SURGE CONTROL (DRAIN TO ATMOSPHERE)	1	CRL
N1	UPSTREAM SURGE CONTROL	1	CRL
Y	HIGH CAPACITY STRAINER	1	X43/80-EP
P9	MANUAL POSITION CONTROL	1	MPC

NOTES

AE/GE : DN 32 - DN 400 / NGE : DN 50 - DN 600
 Recommended ValvApps : D22-POS-CPC.01
 Standard wiring schematic: D22-7D-0001
 (#) : According to valve size this feature could change.

OPTIONAL FEATURES : _____
 NOT FURNISHED BY CLA-VAL : _____