



Heavy Duty Refueling Nozzle



341GF Nozzle with D2 & Dry Break



341GF Nozzle with **HEPCV & Strainer Ball Valve**



341GF Nozzle with **HEPCV & Dry Break**



341GF Nozzle

Connection View

- · Conforms to SAE-AS5877
- Connects to MS24484 Single Point Adapter
- Low Pressure Drop
- · All Aluminum and Stainless Steel Construction
- · Safety Interlock with Square Pins
- · Convenient Guard Bar Hand Grip
- · Guard Bar Protects Operating Handle


The Cla-Val Model 341GF Nozzle is a refueling nozzle for pressure fuel servicing of aircraft, and for bottom loading of tank trucks.

To ensure maximum safety during refueling, the Cla-Val 341GF Nozzle has primary and secondary interlock systems. The primary interlock ensures that the nozzle cannot be opened when it is not connected to an aircraft adapter. The secondary interlock protects the 341GF Series Nozzle from hazards of interfacing with badly worn aircraft adapters. Even when used with a badly worn adapter, the nozzle is safer because it uses square register pins that provide positive alignment with the square slots in the adapter. In addition, the nozzle cannot be removed from the adapter until the operating lever is rotated to the fully-closed position.

To achieve maximum strength and durability, the Cla-Val 341GF Nozzle uses a stainless steel bayonet ring cast within the aluminum collar of the nozzle. The crank shaft of the nozzle extends across the entire width of the interior flow path and is supported from end-to-end by a structural wall that splits the flow path. This wall supports the crank shaft while straightening the flow and keeping flow resistance as low as possible. To reduce aircraft refueling times, the flow resistance though the Cla-Val 341GF Nozzle has the lowest head loss, which means it can fill an aircraft faster than any other nozzle.

Pressure Drop Data



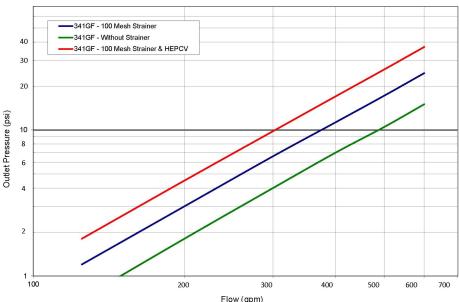


► CLA-VAL UK Limited www.cla-val.co.uk info@cla-val.co.uk EE-341 (R-09/2017)



CLA-VAL 341GF


Heavy Duty Refueling Nozzle

Model Numbering Scheme

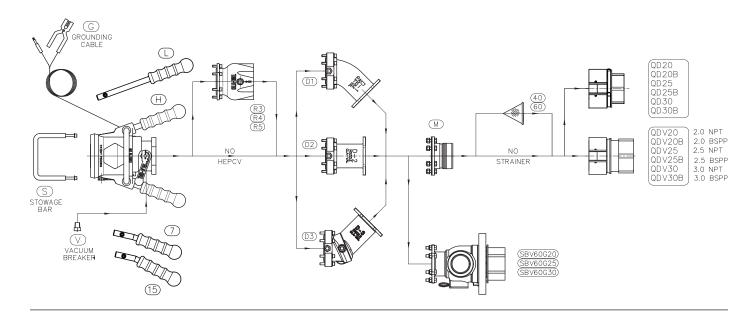

Create Complete Model Numbers for Various Applications

It is easy to customize a 341GF Refueling Nozzle to special requirements. Complete model numbers always begin with "341GF". Add your option selections to this base model number, following the flow chart above from left to right. See example below.

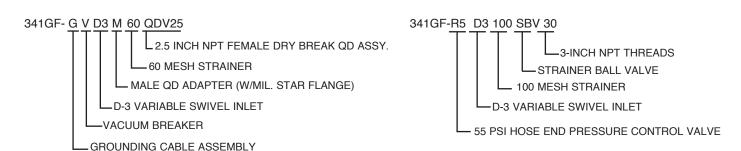

Available Options for Model 341GF


Н	STANDARD HANDLES	40	40 MESH STRAINER
L	LONG HANDLES	60	60 MESH STRAINER
7	STANDARD HANDLES WITH 7° BEND	100	100 MESH STRAINER
15	STANDARD HANDLES WITH 15° BEND	QD	STANDARD QUICK DISCONNECT
G	GROUNDING CABLE	QDV	DRY BREAK QUICK DISCONNECT
V	VACUUM BREAKE	SBV	349GF STRAINER BALL VALVE
S	STOWAGE BAR	В	BLANK SBV INSPECTION COVER
R3	35 PSIG HEPCV WITH FLANGED OUTLET	G	GLASS SBV INSPECTION COVER
R4	45 PSIG HEPCV WITH FLANGED OUTLET	20	2-INCH NPT THREADS
R5	55 PSIG HEPCV WITH FLANGED OUTLET	20B	2-INCH BSPP THREADS
D-1	D-1 ELBOW SWIVEL INLET	25	2.5-INCH NPT THREADS
D-2	D-2 STRAIGHT SWIVEL INLET	25B	2.5-INCH BSPP THREADS
D-3	D-3 VARIABLE SWIVEL INLET	30	3-INCH NPT THREADS
М	MALE QUICK DISCONNECT ADAPTER	30B	3-INCH BSPP THREADS








Heavy Duty Refueling Nozzle

Envelope Dimensions

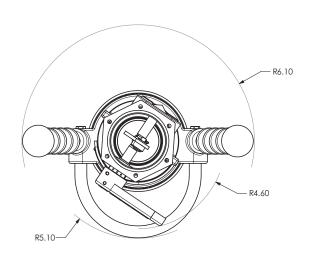

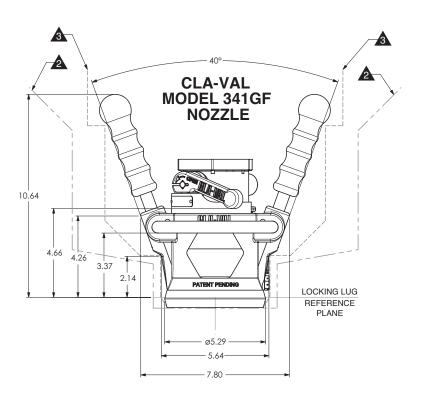

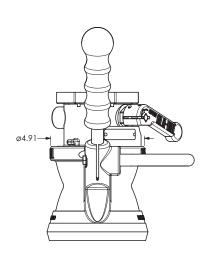

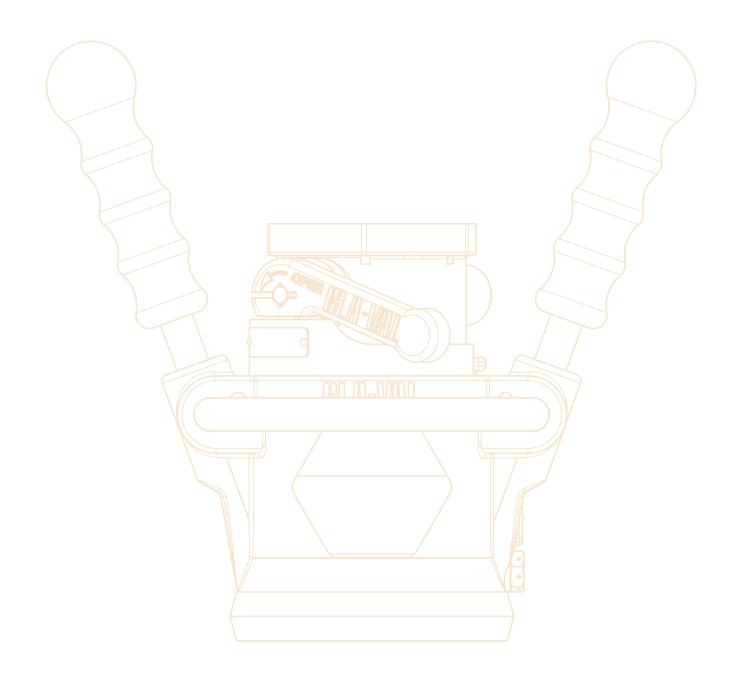



CLA-VAL GLOBAL HEADQUARTERS

1701 Placentia Avenue Costa Mesa, CA 92627 Phone: 800-942-6326 Fax: 949-548-5441

E-mail: info@cla-val.com

CLA-VAL EUROPE

Chemin des Mésanges 1 CH-1032 Romanel/ Lausanne, Switzerland Phone: 41-21-643-15-55

www.cla-val.ch E-mail: cla-val@cla-val.ch

CLA-VAL PACIFIC

45 Kennaway Road Woolston, Christchurch, 8023 New Zealand

Phone: 64-39644860 www.cla-valpacific.com

E-mail: info@cla-valpacific.com

► CLA-VAL UK Limited www.cla-val.co.uk info@cla-val.co.uk EE-341 (R-09/2017)