





# CLA-VAL 90A/G-21

## Fire Protection Pressure Reducing Valve

### Simple, Reliable and Accurate


- U.L. Listed, MEA Approved
- Globe or Angle Pattern
- Proven Reliable Design
- Available in Cast Bronze, Ductile Iron and Cast Steel
- Accurate Pressure Control
- In Line Service
- Grooved Ends (1 1/2" - 8")

CLA-VAL 90G-21 (globe) and 90A-21 (angle) Pressure Reducing Valves are indispensable in any fire protection system. Our diaphragm actuated design is proven highly reliable and easy to maintain. We offer both a globe or angle pattern with a full range of adjustments. These valves are also available in a variety of material options. Epoxy coating is strongly recommended for all fire system valves (excluding bronze valves). The 90G-21 and 90A-21 can be supplied with optional internal and external epoxy coating of the main valve wetted surfaces.

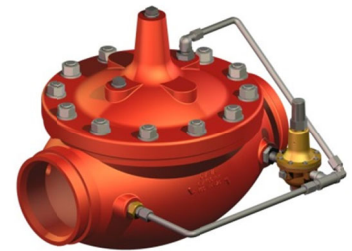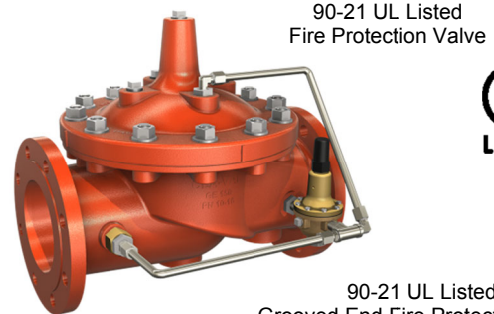

Special System Water Control Valves - Class II  
UL Product Category VLMT - File No. Ex 2534

### Function

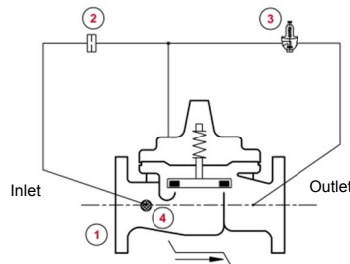


| ITEM | DESCRIPTION                   |
|------|-------------------------------|
| 1    | Model HYTROL AE/GE 100-01/KX  |
| 2    | X58C Restriction Tube Fitting |
| 3    | CRD Pressure Reducing Control |
| 4    | X46A Flow Clean Strainer      |

CLA-VAL 90G-21 (globe) and 90A-21 (angle) Pressure Reducing Valves automatically reduce a higher inlet pressure to a steady lower outlet pressure regardless of changing flow rate and/or varying inlet pressure. The valves pilot control system is very sensitive to slight downstream pressure fluctuations, and will automatically open or close to maintain the desired pressure setting. The downstream pressure can be set over a wide range by turning the adjustment screw on the CRD pilot control. The adjustment screw is protected by a screw-on cover, which can be sealed to discourage tampering.

### Typical Application

Underwriters Laboratories requires the installation of pressure gauges upstream and downstream of the Pressure Reducing Valve. Also, a relief valve of not less than 1/2 inch in size must be installed on the downstream side of the pressure control valve. Adequate drainage for the relief valve discharge must be provided.

The valve may be installed in either vertical or horizontal positions.

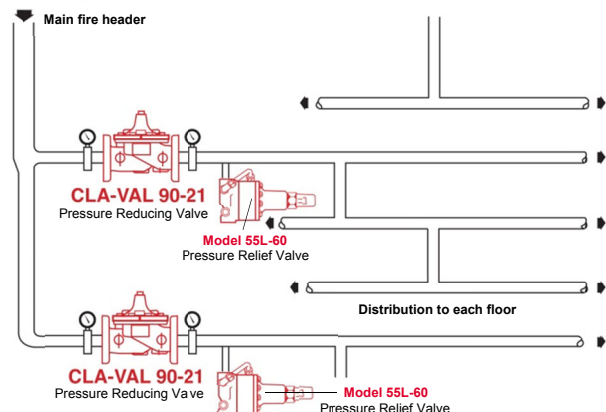


| Size   | UL Listings         |                     |                     |                      |                   |  |  |
|--------|---------------------|---------------------|---------------------|----------------------|-------------------|--|--|
|        | Ductile iron 150# F | Ductile iron 300# S | Ductile iron 300# F | Bronze 300# threaded | Cast steel 300# F | Globe Pattern Ductile iron Grooved end | Angle Pattern Ductile iron Grooved end |
| 1 1/2" | UL                  | UL                  | UL                  | UL                   | UL                | UL                                     | UL                                     |
| 2"     | UL                  | UL                  | UL                  | UL                   | UL                | UL                                     | UL                                     |
| 2 1/2" | UL                  | UL                  | UL                  | UL                   | UL                | UL                                     | UL                                     |
| 3"     | UL                  | UL                  | UL                  | UL                   | UL                | UL                                     | UL                                     |
| 4"     | UL                  | UL                  | UL                  | UL                   | UL                | UL                                     | UL                                     |
| 6"     | UL                  | UL                  | UL                  | UL                   | UL                | UL                                     | UL                                     |
| 8"     | UL                  | UL                  | UL                  | UL                   | UL                | UL                                     | UL                                     |

### ► Dimensions

| Valve size [mm]       | 40  | 50  | 65  | 76,1 | 80  | 100 | 150 | 165,1 | 200 |
|-----------------------|-----|-----|-----|------|-----|-----|-----|-------|-----|
| A Threaded            | 184 | 238 | 279 | -    | 318 | -   | -   | -     | -   |
| AA 150 ANSI           | 216 | 238 | 279 | -    | 305 | 381 | 508 | -     | 645 |
| AAA 300 ANSI          | 229 | 254 | 295 | -    | 337 | 397 | 533 | -     | 670 |
| AAAA Grooved (*)      | 216 | 228 | 279 | 318  | 318 | 381 | 508 | 508   | 645 |
| B                     | 28  | 38  | 43  | -    | 65  | 81  | 109 | -     | 135 |
| BB Grooved (*)        | 52  | 54  | 63  | -    | 77  | 105 | 152 | -     | 184 |
| C (max.)              | 140 | 161 | 192 | -    | 208 | 270 | 340 | -     | 406 |
| CC (max.) Grooved (*) | 104 | 127 | 175 | 165  | 165 | 223 | 281 | 281   | 369 |
| D                     | 71  | 84  | 102 | -    | 116 | 146 | 200 | -     | 254 |
| DD Grooved (*)        | 71  | 84  | 102 | 116  | 116 | 146 | 200 | 200   | 254 |
| E Threaded            | 83  | 121 | 140 | -    | 159 | -   | -   | -     | -   |
| EE 150 ANSI           | 102 | 121 | 140 | -    | 152 | 191 | 254 | -     | 324 |
| EEE 300 ANSI          | 108 | 127 | 149 | -    | 162 | 200 | 267 | -     | 349 |
| EEEE Grooved (*)      | -   | 121 | -   | -    | 152 | 191 | -   | -     | -   |
| F Threaded            | 48  | 83  | 102 | -    | 114 | -   | -   | -     | -   |
| FF 150 ANSI           | 102 | 83  | 102 | -    | 102 | 127 | 152 | -     | 203 |
| FFF 300 ANSI          | 108 | 89  | 109 | -    | 111 | 135 | 165 | -     | 216 |
| FFFF Grooved (*)      | -   | 121 | -   | -    | 114 | 127 | -   | -     | -   |
| G (max.)              | 191 | 197 | 197 | 203  | 203 | 228 | 241 | 241   | 267 |
| GG (max.)             | 206 | 203 | -   | 207  | 207 | 236 | 267 | 267   | 292 |

(\*) Groove Ends per IPS Steel Specifications

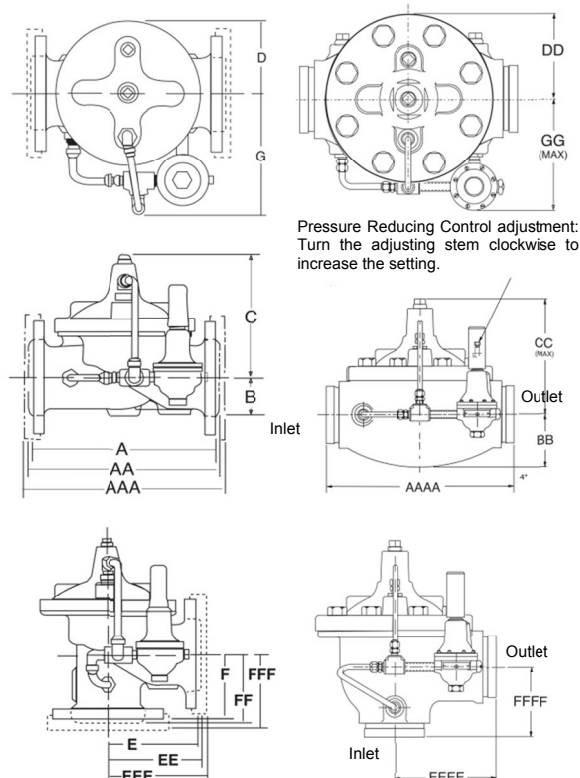



# CLA-VAL 90A/G-21

## Fire Protection Pressure Reducing Valve

### ► Standard Specifications

#### Size:

##### 175 lb. Class

- 1 1/2" - 8" (globe)
- 2" - 6" (angle)

##### 300 lb. Class

- 1 1/2" - 8" (globe)
- 2" - 6" (angle)

#### End Details:

Flanged: 150 ANSI B16.5 (Ductile iron)

Flanged: 300# (Ductile iron)

Flanged: 300# (Cast steel)

Grooved: 300# (Ductile iron)

#### Pressure Differential:

Min. 10 psi / 0.7 bar

#### Pressure Adjustment Range:

175 lb. Class: 30-165 psi / 2.1-11.4 bar

300 lb. Class: 30-165 psi / 2.1-11.4 bar

#### Temperature Range:

Water max. 180°F / 82°C

### ► Materials

#### Main Valve Body & Cover:

Ductile iron - ASTM A536 / EN-GJS-400

#### Main Valve Internal Trim:

Stainless Steel 316 seat and disc guide

Stainless Steel 303 stem, stem nut and cover bearing

#### Pilot Control System- Pilot Control Valve:

Bronze ASTM B62 with Stainless Steel 303 internal trim

Stainless Steel 303 tubing with Stainless Steel 316 fittings (CLA-VAL Europe standard)

#### Main Valve and Pilot Valve:

Diaphragm and disc: Buna-N<sup>®</sup> synthetic rubber

### ► Selection Guidelines

| Flow capacity table |                   |       |
|---------------------|-------------------|-------|
| Valve size          | Maximum flow rate |       |
|                     | [inch]            | [gpm] |
| 1 1/2               | 160               | 36    |
| 2                   | 262               | 59    |
| 2 1/2               | 373               | 85    |
| 3                   | 576               | 131   |
| 4                   | 992               | 225   |
| 6                   | 2251              | 511   |
| 8                   | 3900              | 886   |

Note: The actual capacity is limited by available Differential Pressure. For accurate sizing contact CLA-VAL Europe.

### ► When Ordering, Please Specify

1. Model Number 90-21
2. Valve size
3. Globe or Angle pattern
4. Main Valve Body and Cover Material
5. Threaded, Flanged or Grooved
6. Optional Epoxy Coating (specify with suffix KC)
7. Pressure Class