




# CLA-VAL D22-138-L47

Position Control Valve 4-20 mA with Upstream Pressure Control and Electronic Advanced Controller D22

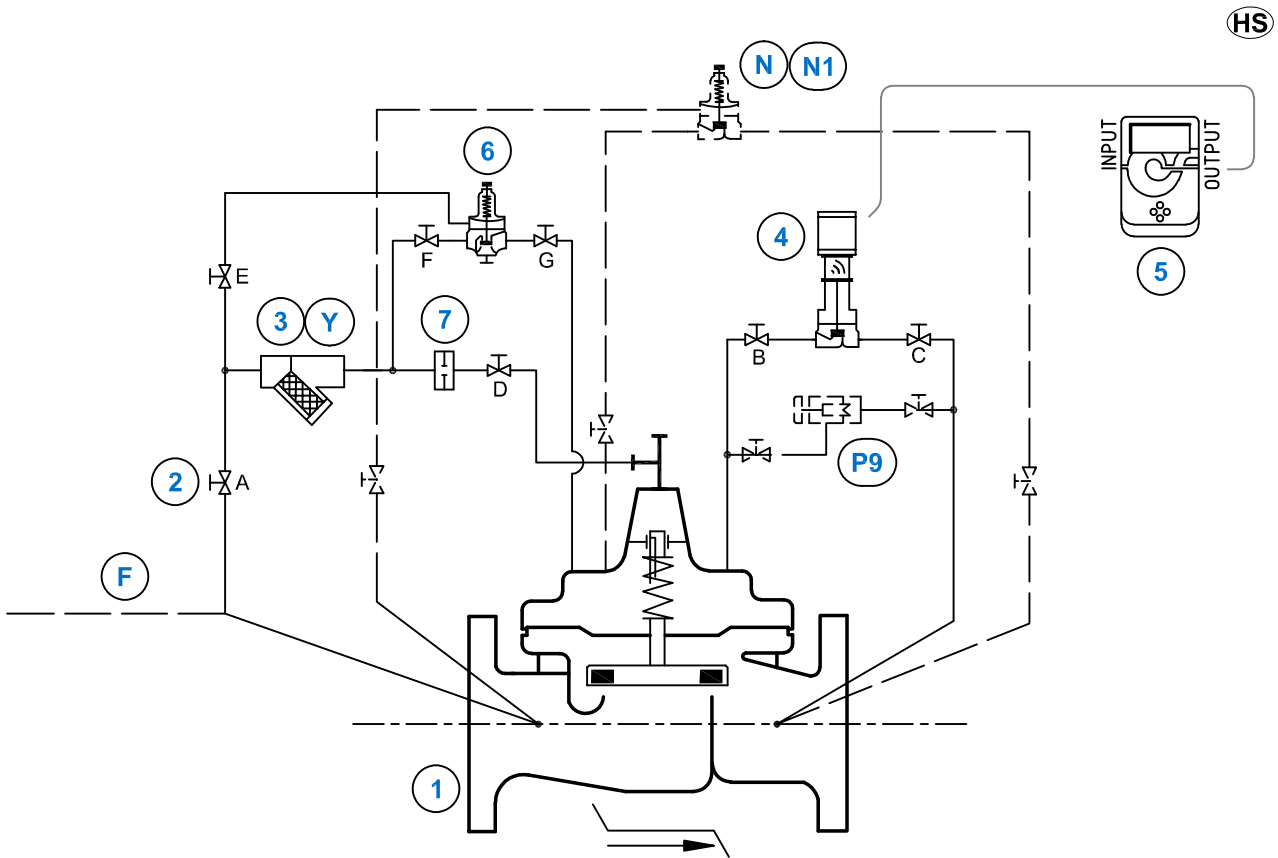

## STANDARD EQUIPMENT

No	Description	Qty	Type
1	MAIN VALVE HYTROL/X743 AE/GE/NGE	1	100-01/X743
2	ISOLATION BALL VALVE	7	RB-117
3	STRAINER	1	X43
4	POSITION CONTROL ACTUATED	1	CPC-34 #
5	ELECTRONIC ADVANCED CONTROLLER	1	D22
6	PRESSURE REDUCING CONTROL	1	CRA-9
7	UNION WITH INCORPORATED RESTRICTION	1	X52-VR

## OPTIONAL FEATURES

No	Description	Qty	Type
F	REMOTE SENSING	1	-
N	UPSTREAM SURGE CONTROL (DRAIN TO ATMOSPHERE)	1	CRL
N1	UPSTREAM SURGE CONTROL	1	CRL
P9	MANUAL POSITION CONTROL	1	MPC
Y	HIGH CAPACITY STRAINER	1	X43/80-EP

## NOTES

AE/GE : DN 32 - DN 400 / NGE : DN 50 - DN 600

Recommended ValvApps : D22-POS-CPC.01

Standard wiring schematic: D22-7D-0001

(#) : According to valve size this feature could change.

OPTIONAL FEATURES : \_\_\_\_\_  
NOT FURNISHED BY CLA-VAL : \_\_\_\_\_